

## Expeditionary Reel

The **Expeditionary Reel** and tether, used in conjunction with the Subsea Vehicle Battery, provide unmatched mobility and efficiency. Lightweight tethers are available in either Copper or Fiber Optic versions.



### Specifications

**Power input:** 48 VDC @ 80 W peak  
**Operating temp.:** -20°C – 60°C (-4°F – 140°F)  
**Ingress protection:** IP65  
**Battery:** NiMH or Lithium




### Features

- Copper tether up to 550 m (maximum) [3.5 mm tether diameter]
- Collapsible handle
- Level wind
- Tether payout encoder



### Connectors

- (1) RJ45 ethernet connector
- (1) USB
- (1) USBL
- (1) M12
- (1) 8-pin tether connector

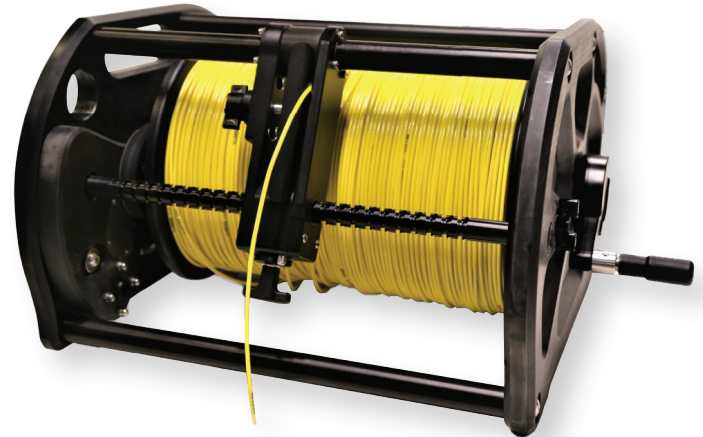

Copper Communications Tether Part #72743



### Reel Size & Weight

- 53.3 x 40.6 x 30.4 cm (21 x 16 x 12 in)
- 23.58 kg (52 lb)
- Delivered in a watertight case

