

PN: 70844

Mission Specialist Defender

The VideoRay Mission Specialist Series is designed and built with power, reliability, and flexibility in mind. The Defender is VideoRay's most powerful configuration, optimized for precise control, larger payloads, lifting capability, and specialized operations.

The Defender utilizes interchangeable, modular components that comprise a single, intelligent network, providing an extremely flexible and customizable platform that can be easily adapted to target-specific missions. It is this flexibility that sets the Mission Specialist ROV series apart from current technology in the Remotely Operated Vehicle industry.



DEFENDER

Defender shown with optional Manipulator and Sonar



Electrical

Power Requirements: 110/220VAC (1-2.4 kW)

400 VDC Power Module: 1,500 W @ 48 VDC

Power Output: 12 V/120 W, 24V/300 W, 48 V/1,500 W

(5) 100 Mbps Ethernet ports, (5) RS-485 ports

Power Control and Monitoring



Environmental


Dry Weight: 17.2 kg (38 lbs)

Dimensions: 71.1 x 39.4 x 23.8 cm

(28.8 x 15.5 x 10.4 in)

Depth Rating: 300 m standard/1,000 m optional

Case: Hard-sided watertight

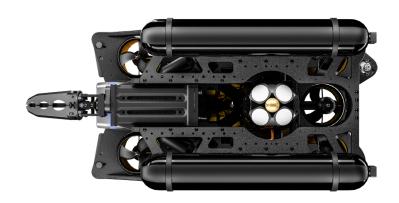

Defender shown with optional Subsea Batteries, Manipulator, Deep-Rated Sonar, USBL, and Navigation Package

PRODUCT DATA SHEET



PN: 70844

Mission Specialist Defender



Propulsion

Brushless Thrusters with Integrated Controller

4 Vectored Horizontal, 3 Vertical

Speed: Thrust:

Forward 23.6 kg

Vertical: 0.8 m/s Sway: 0.9 kt

Forward: 3.8 kts

Reverse 15.0 kg

Lateral 8.6 kg

Lifting:

9.5 kg



Workhorse Splashproof

Controller

Expeditionary Tether & Reel



Workhorse Control Console



VideoRay Performance, Neutral, & Negative Tether



Fiber Optic Tether & Reel



Lighting

2 independent LED light arrays (38 W max ea.)

60° spot beam

110° flood beam

Each array individually controlled

3,000 K CCT, 80 CRI White

7,600 total lumens per LED light module



IMU

9 DOF IMU & Magnetic Compass

Pressure-based depth sensor:

100 Bar, with 400 Bar optional

0.2° Static Roll/Pitch

0.5° Dynamic Roll/Pitch

18°/h Gyro Bias Stability

1.0° Yaw



Integrated Options

- Subsea Batteries-Li-ion, NiMH
- Camera-Auxiliary, 3d Modeling
- Navigation DVL/GPS, USBL
- SONAR-Forward, Side, Scanning
- Manipulator—Single, Dual, Multi-Axis
- NDT/Sampling/Cavitation Cleaner
- MCM/UXO Neutralizers